






ITEM	ED B4AC0158F
LIGHT SOURCE	1x2.2W
LENS	B15
SELECTED DEGREE(°)θ1/2	10°
INPUT VOLTAGE(V)	DC 24
OPERATING CURRENT(MA)	125
CONSUMPTION(W)	3
LUMINANCE(LM)	CW=200 WW=185
IK	07



WATER PROOF SOLUTION

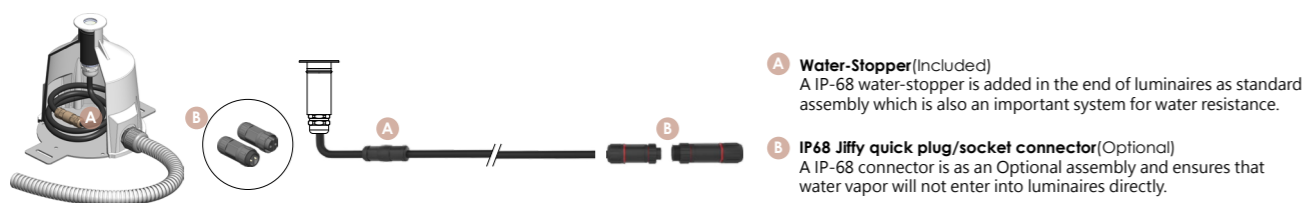


SLEEVE (Included)

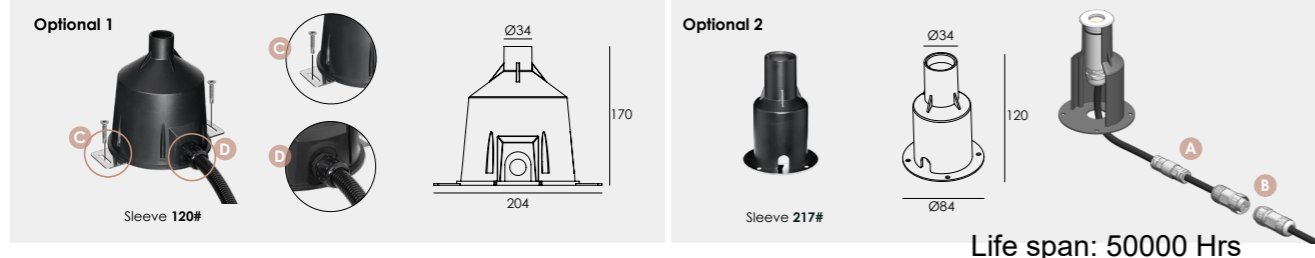


Life span: 50000 Hrs

FRONT COVER & HOUSING	Molding shaped sus 316# stainless steel housing
LIGHT WINDOW	Step Tempered glass, T=4mm
CABLE GLAND	IP68 PG-11 copper with nickel-coated
GASKET	EPDM gasket
LENS	OPTICS lens, efficiency≥85%
LED TYPE	SMD
PCB	Excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
LED DRIVER	Constant Voltage Input, Constant Current Output Build inside
POWER CABLE OPTIONAL	Outside of luminaire H07RN-F 2x1.0mm ² with water-stopper, L=3m, 5m
GLASS PRESSURE CAPACITY	671kgs
OPERATING TEMPERATURE	-20°C~50°C
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized
RECESSED SLEEVE	120# PC/ABS ALLOYS, with 304 stainless steel bottom plate


OPTICS	Referenced Degree(°)θ1/2
B15	10° 21° 40°

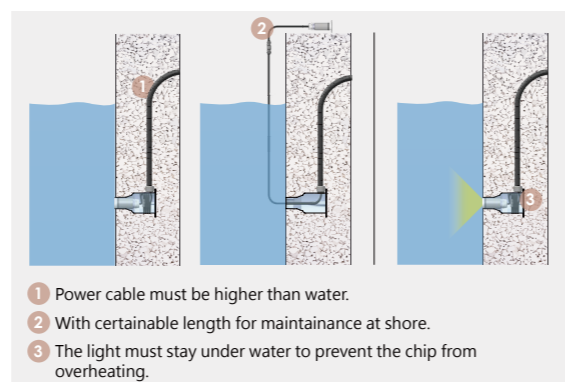

PHOTOMETRIC

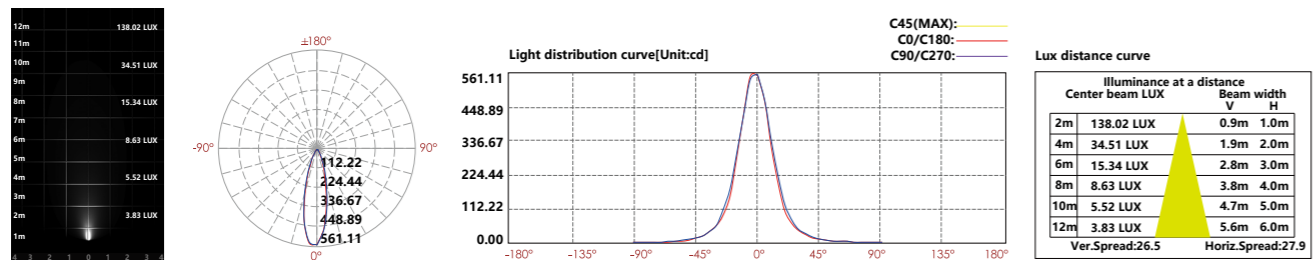


ITEM	ED A4AA0358F-40
LIGHT SOURCE	3x1.5W
LENS	A8
SELECTED DEGREE(°)θ1/2	40°
INPUT VOLTAGE(V)	DC 24
OPERATING CURRENT(MA)	305
CONSUMPTION(W)	5.4
LUMINANCE(LM)	CW=520 WW=472
IK/ CCT/CRI	07/ 3000K/ 80




TYP:EX SP2

Life Span: 50000 Hrs

WATER PROOF SOLUTION

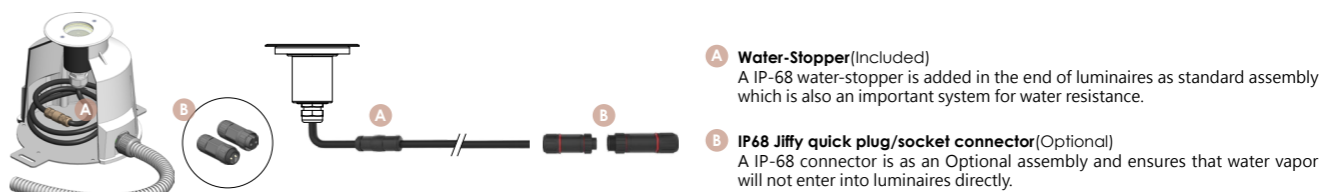


SLEEVE (Included)

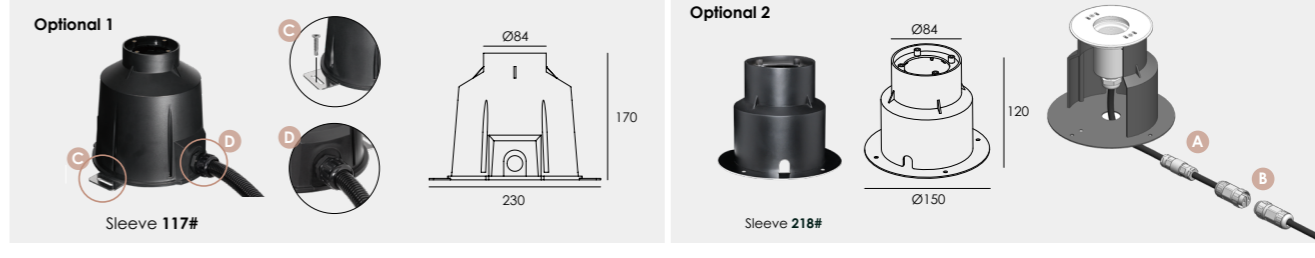

FRONT COVER & HOUSING	Hard chromeplated molding shaped SUS 316L# stainless steel housing & Honey Comb
LIGHT WINDOW	Step Tempered glass, T=8mm
CABLE GLAND	IP68 PG-11 copper with nickel-coated
GASKET	EPDM gasket
LENS	All-in-one OPTICS lens, efficiency≥85%
LED TYPE	SMD
PCB	Excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
LED DRIVER	Constant Voltage Input, Constant Current Output Outside of luminaire
POWER CABLE OPTIONAL	H07RN-F 2x1.0mm ² with water-stopper, L=3m, 5m
GLASS PRESSURE CAPACITY	2607kgs
OPERATING TEMPERATURE	-20°C~50°C
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized
RECESSED SLEEVE	117# PC/ABS ALLOYS, with 304 stainless steel bottom plate

OPTICS	Referenced Degree(°)θ1/2
A8	15° 21° 40°

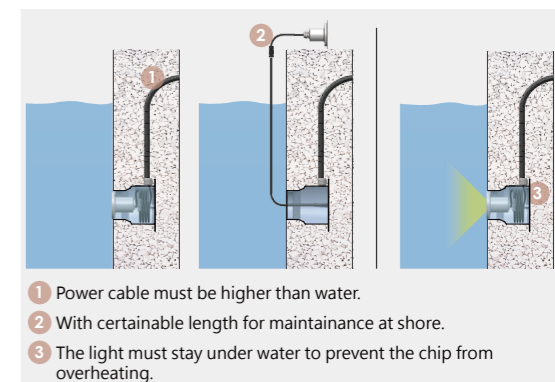

PHOTOMETRIC

