

ITEM
ED B4TB1257

LIGHT SOURCE
12x1.5W

SELECTED DEGREE(°)θ1/2
30°


INPUT VOLTAGE(V)
DC 24

OPERATING CURRENT(MA)
1200

CONSUMPTION(W)
22.8


LUMINANCE(LM)
CW=1630 WW=1330

IK/ CCT/ CRI
09/ 3000K/ 80



Life Span: 50000 Hrs

WATER PROOF SOLUTION

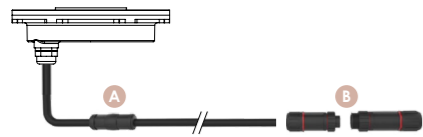

- A Water-Stopper**(Included)
A IP-68 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP68 Jiffy quick plug/socket connector**(Optional)
A IP-68 connector is as an Optional assembly and ensures that water vapor will not enter into luminaires directly.

HOUSING Hard chromeplated molding shaped stainless steel SUS 316#

LIGHT WINDOW Step Tempered glass.T=10mm

CABLE GLAND IP68 PG-11 copper with nickel-coated

GASKET Silicone gasket

PCB Excellent heat conductivity aluminum.coefficient of heat Conductivity≥2.0w/mk

LED TYPE SMD

LED DRIVER Constant Voltage Input,Constant Current Output

GLASS PRESSURE CAPACITY 1802kgs

OPERATING TEMPERATURE -20°C~50°C


BUILT-IN OVERHEAT SENSOR SYSTEM Automatic Shutdown at 75°C

POWER CABLE OPTIONAL Outside of luminaire H07RN-F 2x1.0mm² with water-stopper, L=3m, 5m


DIMMING SUPPORT Triac PWM Available
1-10V Dali Customized

OPTICS Referenced Degree(°)θ1/2

	B13	6°	13°	20°	30°	40°
--	-----	----	-----	-----	-----	-----




Central Ejector



Water jet pipe G1 1/2"taper

PHOTOMETRIC

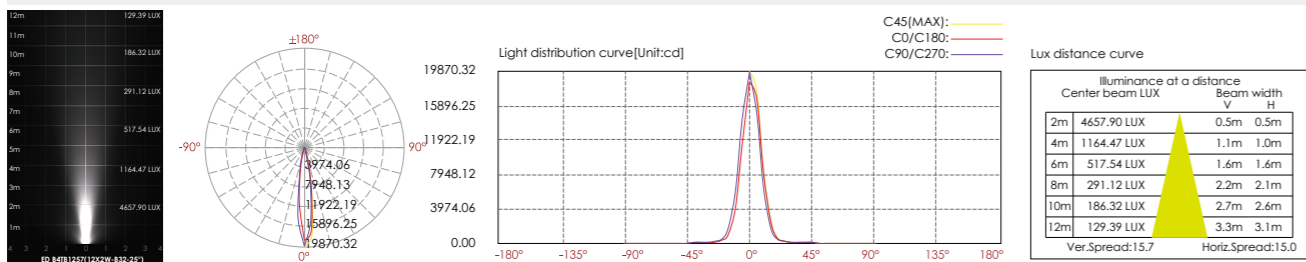

TRIAC PWM 1-10V DALI IP68 OUTDOOR RATED RoHS CE

