



ITEM
ED B8ELB0459-GREY

LIGHT SOURCE
4×1.5W

LENS
FB11B4

SELECTED DEGREE(°)θ1/2
30°

INPUT VOLTAGE(V)
DC 24 120 240


OPERATING CURRENT(MA)
DC 24=630 120=146 240=73

CONSUMPTION(W)
DC 24=8 120=9.5

LUMINANCE(LM)
527

IK/ CCT/ CRI
05/ 3500K/ 80
Life span: 50000 Hrs

FA-SP01

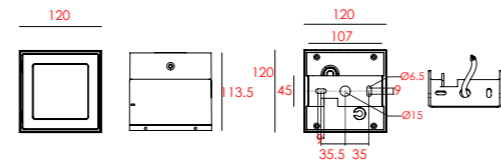

ITEM
ED B8FLB0958

LIGHT SOURCE
9×3W

LENS
FB12B5

SELECTED DEGREE(°)θ1/2
30°


INPUT VOLTAGE(V)
DC 24 120 240

OPERATING CURRENT(MA)
DC 24=1170 120=245 240=133

CONSUMPTION(W)
DC 24=28 120=29.8 240=29.6


LUMINANCE(LM)
2541

IK
06

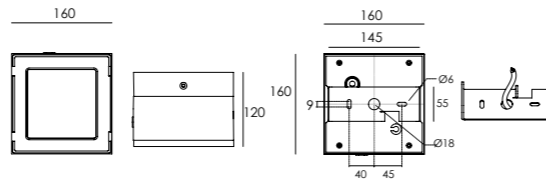


ACCESSORIES(Optional)

ANTI GLARE LOUVER

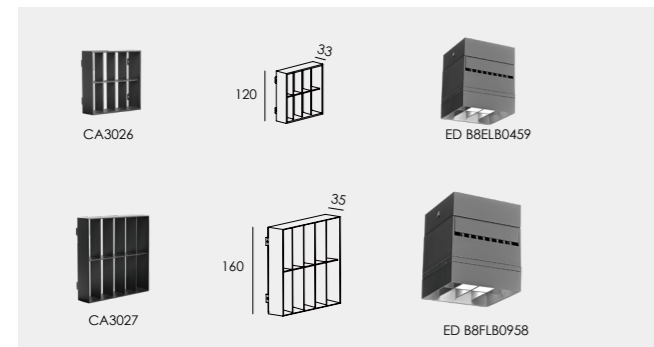


FAMILY ITEM APPLICATIONS

Wall Washer •See Catalogue page 86

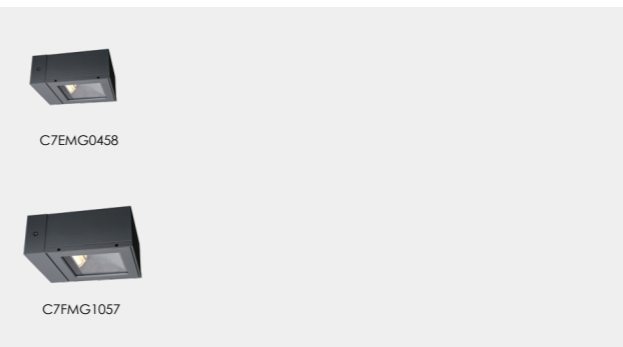

PAINTING COLOR

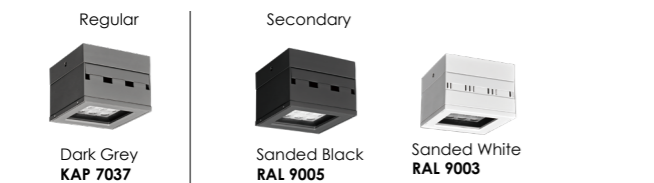

HOUSING MATERIAL 12#Die-casting aluminum

PAINTING Powder coating, T= 60~80 μm. Adhesion of ISO class 1/ASTM class 4B

REFLECTOR OPTICS reflector. efficiency≥85%

LED TYPE SMD

POWER CABLE Outside of luminaire H05RN-F 2×1.0mm², L=0.3m(12V/24V) H05RN-F 3×1.0mm², L=0.3m(120V/240V)

OPERATING TEMPERATURE -20°C~50°C

OPTICS		Referenced Degree(°)θ1/2					
	FB11B4	9°	15°	20°	30°	45°	60°
	FB12B5	9°	15°	20°	30°	45°	60°

PHOTOMETRIC

