

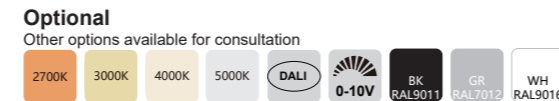


product name required



Medium beam	Power	CCT	β	Luminous flux	Control	SDCM	CRI	LED	Voltage
ED6140.15.30K	14W	3000K	15°	1512lm	ON/OFF	< 3	> 80	COBx1	220V-240V
ED6140.24.30K	14W	3000K	24°	1595lm	ON/OFF	< 3	> 80	COBx1	20V-240V
Wide beam									
<b>ED6040.36.30K</b>	<b>14W</b>	<b>3000K</b>	<b>38°</b>	<b>1412lm</b>	<b>DALI</b>	<b>&lt; 3</b>	<b>&gt; 80</b>	<b>COBx1</b>	<b>220V-240V</b>
ED6140.50.30K	14W	3000K	50°	1020lm	ON/OFF	< 3	> 80	COBx1	220V-240V
Spread beam									
ED6140.2050.30K	14W	3000K	20°*50°	945lm	ON/OFF	< 3	> 80	COBx1	220V-240V

Lighting Effects

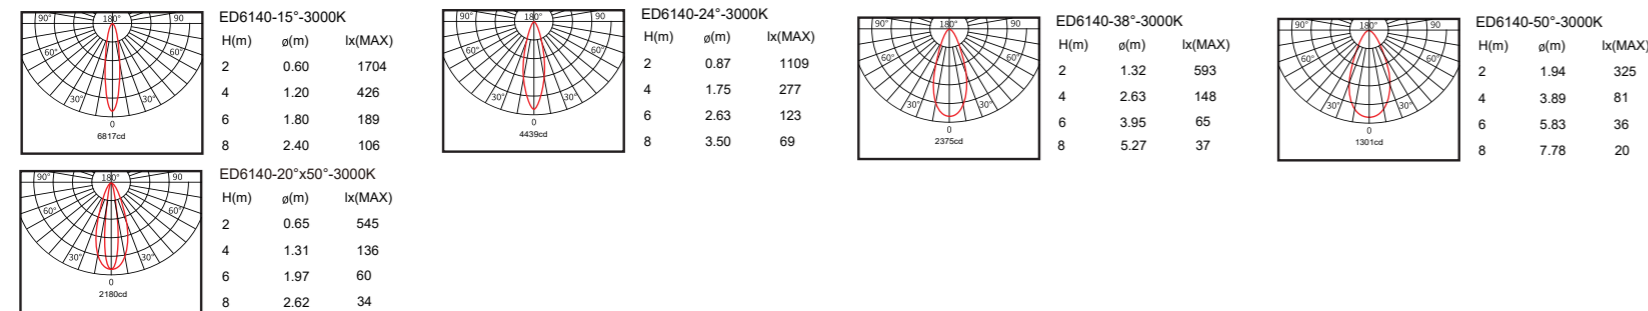


Accessories—ED6160




Die casting aluminum stepped faceplate

Life span: 50000 Hrs

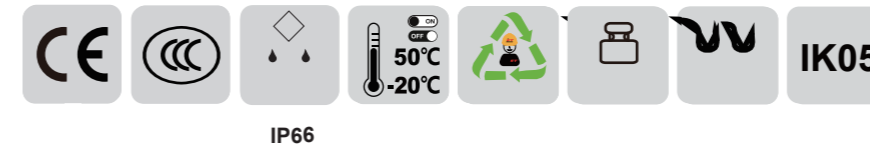


product name required

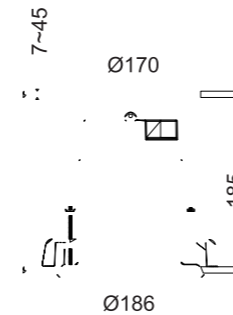

Medium beam	Power	CCT	β	Luminous flux	Control	SDCM	CRI	LED	Voltage
ED6141.15.30K	20W	3000K	15°	2179lm	ON/OFF	< 3	> 80	COBx1	220V-240V
ED6141.24.30K	20W	3000K	24°	2172lm	ON/OFF	< 3	> 80	COBx1	20V-240V
Wide beam									
ED6041.36.30K	20W	3000K	36°	2000lm	ON/OFF	< 3	> 80	COBx1	220V-240V
ED6141.50.30K	20W	3000K	50°	1860lm	ON/OFF	< 3	> 80	COBx1	220V-240V
Spread beam									
ED6141.2050.30K	20W	3000K	20°*50°	1514lm	ON/OFF	< 3	> 80	COBx1	220V-240V

Lighting Effects

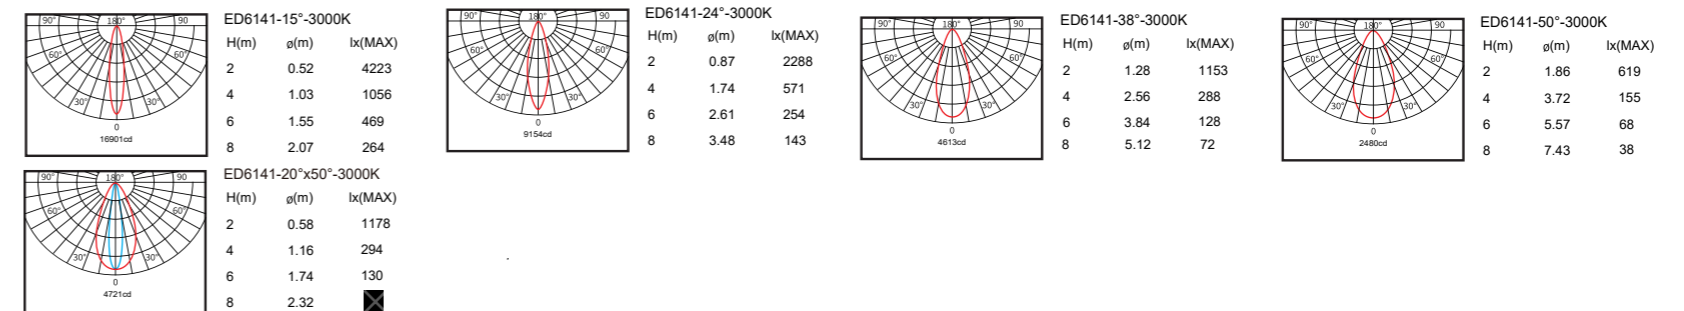

Accessories—ED6148



Die casting aluminum stepped faceplate.