





Rigid channel

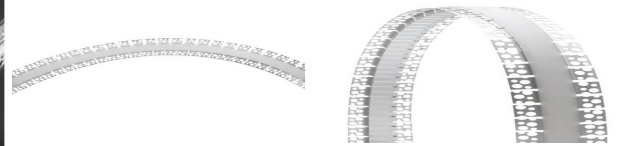

Bendable channel




EDF2835X15

Product details


Model	Rated Watt	DC Voltage	Beam Angle	CCT	CRI	IP Rating	
EDF2835X15	24W/M	24V	120°	3000k	90	20	
EDF2835X15-1	24W/M	24V	120°	3000k	90	54	
EDF2835X15-2	24W/M	24V	120°	3000k	90	65	
EDF2835X15-3	24W/M	24V	120°	3000k	90	67	
EDF2835X15-4	24W/M	24V	120°	3000k	90	68	

Lumens	Binning
427LM/W	SDCM 3 step Mac Adam








Life span: 50000 Hrs

Light Distribution

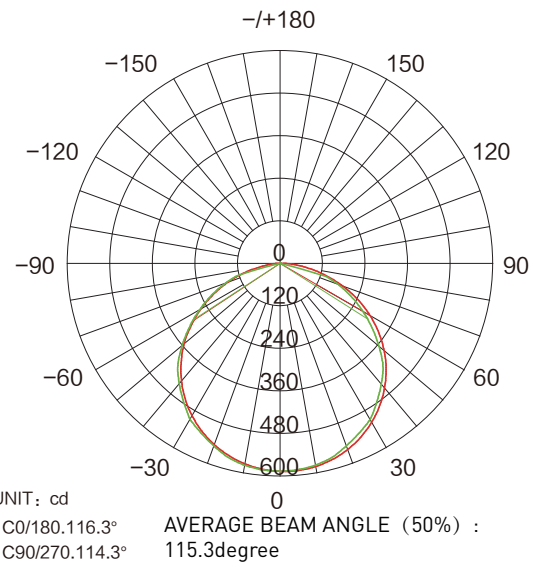

Profile 509



Note: For more types of profile and customize length, please contact us for solutions

