


# Specification

## ED-SFW27 Monocolor (Silicone)

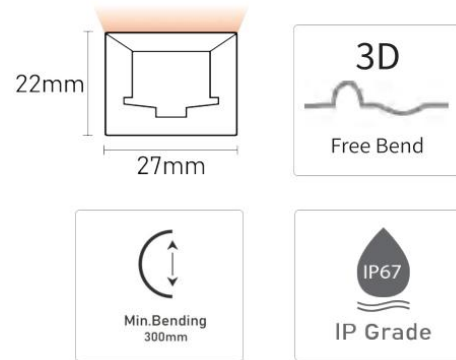

### Technical Parameters

Electrical	Input Voltage	DC24V
	Power Consumption	24W/m
Optical	LED Type & Brand	SMD 2835, Lumileds
	CRI	>90
	Beam Angle	20°
Physical	Min. Cutting Length	250mm Φ300mm
	Min. Bending Diameter	
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C

### Models List

Model No.	Voltage	Color	Power/m	LED Qty/m	Min. Cutting	Lumen/m	Max. Run Length
SFW27-3D-B-CV24-24D-27K-R90-24W	24V	2700K	15W	24pcs	250mm	1560lm±5%	5m
SFW27-3D-B-CV24-24D-30K-R90-24W	24V	3000K	15W	24pcs	250mm	1560lm±5%	5m
SFW27-3D-B-CV24-24D-35K-R90-24W	24V	3500K	15W	24pcs	250mm	1560lm±5%	5m
SFW27-3D-B-CV24-24D-40K-R90-24W	24V	4000K	15W	24pcs	250mm	1560lm±5%	5m
SFW27-3D-B-CV24-24D-50K-R90-24W	24V	5000K	15W	24pcs	250mm	1560lm±5%	5m
SFW27-3D-B-CV24-24D-57K-R90-24W	24V	5700K	15W	24pcs	250mm	1560lm±5%	5m
SFW27-3D-B-CV24-24D-65K-R90-24W	24V	6000K	15W	24pcs	250mm	1560lm±5%	5m
SFW27-3D-B-CV24-24D-R-R90-24W	24V	Red	15W	24pcs	250mm	355lm±5%	5m
SFW27-3D-B-CV24-24D-G-R90-24W	24V	Green	15W	24pcs	250mm	715lm±5%	5m
SFW27-3D-B-CV24-24D-B-R90-24W	24V	Blue	15W	24pcs	250mm	115lm±5%	5m

### Illuminance Distribution

